# YOKOHAMA

WINTER TYRE CATALOGUE 2020/2021

▶ PCR/SUV/LIGHT COMMERCIAL VEHICLES









# This is YOKOHAMA

#### The Global Tyre Brand since 1917

The YOKOHAMA Rubber Group is composed of the YOKOHAMA Rubber Co., Ltd. and 135 subsidiaries, and 50 affiliates around the world.

# Original Equipment YOKOHAMA tyres have been adopted worldwide by car manufacturers with a global reputation and in a wide range of vehicle categories, being the Tyre supplier for premium cars.

#### Winning in Red and Black

Under the colours red and black, YOKOHAMA's range of ADVAN Tyres can supply the tyres for World Championships and International top level Motorsport competitions.



#### The BluEarth Concept

BluEarth, the product engineering philosophy for Environmental, Human and Socially Friendly Tyres from YOKOHAMA. Delivering full driving pleasure while reducing the global environmental impact at the same time.









#### **Chelsea Football Club**

YOKOHAMA Tyres as a Japanese premium tyre manufacturer is an Official Club partner of Chelsea FC – Legendary and successful English football club. Aiming high and striving together for success.

# **YOKOHAMA High Performance Winter Tyres**











#### For Passenger Cars and SUVs

- Series: 30% 80% - Inches: 22 - 15
- Speed symbol: W/V/H/T

#### For Passenger Cars

- Series: 45% - 80% - Inches: 16 - 13 - Speed symbol: H/T

# **YOKOHAMA Light Commercial Vehicle Tyres**



#### For Light Commercial Vehicles

- Series: 60% - 75%

- Inches: 17 - 14

- Speed symbol: T/R/Q

# **YOKOHAMA All Season Tyres**



BluEarth-45 AW21

#### All Season Tyres for Passenger Cars and SUVs

- Series: 40% - 65% - Inches: 19 - 14

- Speed symbol: Y/W/V/H/T

Agent: TÜV SÜD Product Service GmbH, Test: Benchmark Test 2018 on a voluntary basis, Test report No: 713125573, Test Period: March - June 2018, Test Locations: Wet & Dry: ATP Papenburg (GER), Snow & Ice: YOKOHAMA Test Center of Sweden (SWE), Rolling Resistance: TÜV SÜD PS Garching (GER), Noise: FAKTmotion Memmingerberg (GER), Test Vehicle: VW Golf VII 1.6 TDI, 1.5 TSI & 2.0 TDI, Tyre Size: 195/65R15 91H (but certificate is valid for all AW21 sizes)

#### **Content Summary**

EU Tyre Label F	10
Available Sizes P11 - F	
Technical Information F	14
For Your Comfort & Safety F	14
Explore the world of YOKOHAMA F	

Please note: The availability of tyres varies from country to country. Please contact your local distributor for details. All technical information contained in these pages may be subject to change.



BluEarth\*WINTER V905

C



### Confidence for all winter conditions



Available sizes on pages 11-13

#### Application: Performance cars, SUVs, middle sized cars

#### **Benefits**

- Evolutional snow traction
- Drainage performance on snow & wet
- Fuel saving properties
- Sure driving feeling on high-speed cruising

#### **Features**

- Wide slanting grooves and variable angle of lateral grooves
- Low-heat-generating under tread

#### Zig-Zag Straight Grooves and variable angle of Lateral Grooves




Improved lateral stabilities such as turning and anti-sliding on snow & ice.

#### **Wide Slanting Grooves**



Avoids hydroplaning on slushy or wet surfaces with see-through arrangement.

#### **Under Tread Compound**



Low-heat-generating under tread, reduces energy-loss by sustaining rigidity.



See page 11-13 for detailed information.

# Winter is inspiration. Drive your emotion.













Directional



EU Label Grade	
Fuel Efficiency Class	F
Wet Grip Class	С
External Rolling Noise Cla	
and Measured Value (dB)	70-72
Series: 45 % – 80 %	nches: 16-13

See page 12-13 for detailed information.

Available sizes on pages 12-13

#### **Application:** Small and compact cars

#### **Benefits**

- · Direct feeling of control on snow and wet surfaces
- Superior stability on high-speed cruising
- Fuel saving properties

#### **Features**

- Original Multi-Layer Sipes
- 3-D shaped block wall with groove in groove design
- Zig-Zag shaped main straight grooves

#### **Tread Pattern Design**



The pattern design delivers clear-cut performance.

#### **Directional Tread Design**

1) The directional tread pattern provides a "direct-feel" and traction on snowy and slushy road surfaces and drainage on wet road surfaces.

#### **Original Multi-Layer Sipes**

2 YOKOHAMA's original multi-layer sipes maximise the edge effect on snowy and icy road surfaces, keeping blocks stable despite the soft compound.

#### 3-D Shaped Block Wall with **Groove in Groove Design**

3 The centralized rib-block with a 3-D shaped block wall delivers dry stability by supporting the contact surface. Micro-sized grooves on the 3-D shaped block wall control uneven wear by dispersing stress and heat.



#### Zig-Zag Shaped Main **Straight Grooves**

The Zig-Zag shaped main straight grooves provide traction with their grooved edge and provide high drainage to avoid hydroplaning on wet surface.



# Durability and Confidence with Winter Performance for Light Commercial Vehicles


















**Fuel Saving Properties** 





See page 12-13 for detailed information.

Available sizes on pages 12-13

#### **Application:** Light Commercial Vehicles

#### **Benefits**

- Confident wet braking and wet handling
- Remarkable durability performance
- Fuel saving properties
- The optimised combination of directional tread design and compound deliver reliable performance on snow and ice

#### **Features**

- 3 wide grooves
- Traction Blocks with micro diagonal sipes
- Rigid shoulder rib with lug

#### 3 Wide Grooves



Water evacuation provided by 3 wide grooves, even after long mileage.

#### **Traction Blocks with Micro Diagonal Sipes**



Providing "direct-feel" and "traction" on SNOW and ICE surface. Diagonal Shallow slits on the tyre tread surface provide optimum performance even in the break-in period.

#### Rigid Shoulder Rib with Lug



Moderating stiffness blocks help even wear for long mileage.

YOKOHAMA

# The One for All Seasons



# BluEarth-45 AW21





**Fuel Saving** 







**Directional** 





Maximum speed
300 km/h in case of Y speed symbol
270 km/h in case of W speed symbol
240 km/h in case of W speed symbol
210 km/h in case of H speed symbol
190 km/h in case of T speed symbol
(Speed symbol varies depending on size)



EU Label Grade	
Fuel Efficiency Class	C-E
Wet Grip Class	B-C
External Rolling Noise Class	2
and Measured Value (dB)	70-73
Series: 40 % – 65 % Inche	es: 19-14

Some sizes are waiting for final labelling results. See page 11-13 for detailed information.

Application: Small and Compact cars, mid-size sedan, modern SUVs & CUVs

Available sizes on pages 11-13

#### **Benefits**


- Reliable grip on wet & snowy winter roads
- Impressive braking performance on wet & dry summer roads
- Remarkable Mileage Performance

#### **Features**

- Divergent V-Groove
- Flat & Wide Contour
- Silica End-locked compound

#### Compound

for SNOW/ICE/WET Performance

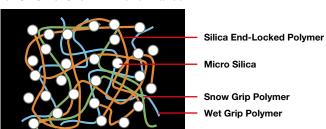

#### **Tread Pattern Design**

for SNOW/ICE/WET Performance



Confident driving on unfavourable road conditions






Safe driving at every-day use

Agent: TÜV SÜD Product Service GmbH, Test: Benchmark Test 2018 on a voluntary basis, Test report No: 713125573, Test Period: March – June 2018, Test Locations: Wet & Dry: ATP Papenburg (GER), Snow & Ice: YOKOHAMA Test Center of Sweden (SWE), Rolling Resistance: TÜV SÜD PS Garching (GER), Noise: FAKTmotion Memmingerberg (GER), Test Vehicle: VW Golf VII 1.6 TDI, 1.5 TSI & 2.0 TDI, Tyre Size: 195/65R15 91H (but Certificate is valid for all AW21 sizes)

# **EU Tyre Label**




In 2012 the European Union introduced a tyre label, in order to provide standardised information on 3 specific performances; fuel efficiency, wet grip and external rolling noise.

Tyre labelling for passenger cars and light trucks took effect from November 2012, for tyres on sale in the EU under European Regulation (EC/No. 1222/2009) which were manufactured after 1st July 2012.

The label is accompanied on the actual tyre and gives consumers useful information to assist them when purchasing new tyres.

On the left you can find an example of the EU tyre label. These graphics on the label are similar as those already used for household appliances and more recently new cars.




#### Rolling resistance (Fuel efficiency)

Rolling resistance is one of the main resistive forces on a vehicle, which acts as an opposite force to the direction in which the tyre is rolling. The rolling tyre deforms and dissipates energy. The tyre whose rolling resistance is greater, requires more fuel to move the vehicle forward. Therefore rolling resistance influences fuel consumption and the environment directly.

On the top left of the label, this shows 7 classes which range from A (most efficient) to G (least efficient), the grading indicates the tyre's contribution to fuel efficiency and CO2 emissions.





#### Wet grip (Braking performance)

Wet grip is one of the most important safety aspects of a tyre. The tyres with excellent grip in wet surfaces have shorter braking distance when driving in rainy weather.

There are other important parameters which are also related to safety. However, consumers will be able to check and select for themselves their preferred performance.

On the top right of the label, wet grip is also expressed in classes ranging from A (highest performance) to G (lowest performance).





#### **External noise**

Traffic noise is a major factor of nuisance and a very relevant environmental issue. On the lower part of the label, this indicates the level of exterior tyre noise from the vehicle (not the internal noise heard by the driver), expressed in decibels. The grading indicates the tyre's contribution to traffic noise and the environment. The label displays sound waves and corresponding levels ranging from 1 (least noise) to 3 (highest noise)

- 1 sound wave corresponds to the lowest external noise level or the best external noise level performance of the tyre;
- 2 sound waves correspond to the average external noise level or the average external noise level performance of the tyre;
- 3 sound waves correspond to the highest external noise level or the weakest external noise level performance of the tyre.



**EU Tyre Label** Icon Explanation



- 🐞 = Fuel Efficiency Class on Regulation (EC) No. 1222/2009 amended by Regulation (EC) No. 228/2011 and Regulation (EC) No. 1235/2011
- = Wet Grip Class on Regulation (EC) No. 1222/2009 amended by Regulation (EC) No. 228/2011 and Regulation (EC) No. 1235/2011
  - = External Rolling Noise Class and Measured Value (dB) on Regulation (EC) No. 1222/2009 amended by Regulation (EC) No. 228/2011 and Regulation (EC) No. 1235/2011

#### Available Sizes - Passenger Cars/SUVs

			Approved	<i>⊕B/</i>	u E	arti			All Season  BluEarth							
Inch	Series	Size	rim width	BluEarth∗WINTER V905	(L <sup>n</sup>	.O.Ž	<b>(</b> Fo)	С	BluEarth-4S AW21	C.		(C-0)				
22	30	295/30R22	10~11	103V XL	E	С	2 74	C1		+			H			
21	30	325/30R21	11~12	108V XL	Е	С	2 74	C1					Ī			
	35	285/35R21	9.5~11	105V XL	E	С	2 74	C1					I			
		295/35R21	10~11.5	107V XL	С	С	2 74	C1								
		315/35R21	10.5~12.5	111W XL	С	С	2 74	C1					Ļ			
	40	245/40R21	8~9.5	100V XL	С	С	2 71	C1		-			Ļ			
		265/40R21	9~10.5	105V XL	С	С	2 73	C1					ŀ			
		275/40R21 295/40R21	9~11 10~11.5	107W XL 111V XL	С	С	2 72	C1		-			ŀ			
		315/40R21	10.5~12.5	115V XL	С	С	2 74	C1					H			
	45	275/45R21	8.5~10.5	110V XL	С	С	2 73	C1					t			
20	30	285/30R20	9.5~10.5	99W XL	Е	С	2 74	C1					T			
	35	265/35R20	9~10.5	99V XL	Е	С	2 71	C1								
		315/35R20	10.5~12.5	110V XL	Е	С	2 74	C1					Ī			
	40	245/40R20	8~9.5	99V XL	С	С	2 71	C1					L			
		265/40R20	9~10.5	104V XL	С	С	2 73	C1		_ ļ			L			
		275/40R20	9~11	106V XL	E	С	2 73	C1		_			ļ			
		295/40R20	10~11.5	110V XL	С	С	2 74	C1					Ļ			
	45	245/45R20	7.5~9	103V XL	С	С	2 72	C1					ŀ			
		255/45R20 275/45R20	8~9.5 8.5~10.5	105V XL	С	С	2 73	C1					H			
	50	275/45R20 255/50R20	7~9	110V XL 109V XL	С	С	2 73	C1					H			
	50	265/50R20	7.5~9.5	111V XL	C	С	2 73	C1					F			
	55	235/55R20	6.5~8.5	102V	С	С	2 72	C1					T			
19	35	225/35R19	7.5~9	● 88W XL	-	-		C1					f			
	-	235/35R19	8~9.5	91W XL	E	С	2 71	C1								
		255/35R19	8.5~10	96W XL	E	С	2 71	C1					Ī			
		265/35R19	9~10.5	98W XL	E	С	2 71	C1								
		285/35R19	9.5~11	103W XL	С	С	2 74	C1					Ĺ			
	40	225/40R19	7.5~9	93W XL	E	С	2 72	C1								
		245/40R19	8~9.5	98V XL	С	С	2 72	C1		-			Ļ			
		255/40R19	8.5~10	100V XL	С	С	2 73	C1					Ļ			
		265/40R19	9~10.5	102W XL	С	С	2 73	C1					+			
		275/40R19 285/40R19	9~11 9.5~11	105W XL 107W XL	С	С	2 73	C1					ŀ			
	45	225/45R19	7~8.5	96V XL	E	С	2 72	C1	96V XL	Е	В	2 72	ł			
	40	235/45R19	7.5~9	99V XL	С	С	2 72	C1	30772				Ī			
		245/45R19	7.5~9	102W XL	С	С	2 72	C1					t			
		255/45R19	8~9.5	104V XL	С	С	2 73	C1					Ť			
		275/45R19	8.5~10.5	108V XL	С	С	2 73	C1					T			
		285/45R19	9~10.5	111V XL	С	С	2 74	C1					Ī			
	50	235/50R19	6.5~8.5	● 103V XL	-	-		C1								
		245/50RF19	7~8.5	105V XL	E	С	2 71	C1					ļ			
		255/50R19	7~9	107V XL	С	С	2 73	C1	107W XL	С	В	2 73	ŀ			
		265/50R19	7.5~9.5	110V XL	С	С	2 73	C1	201/		-	0 70	ŀ			
	55	225/55R19	6~8	99V	С	С	2 72	C1	99V	С	В	2 72	H			
		235/55R19	6.5~8.5	105V XL 101V	С	С	2 72	C1	105W XL	С		2 72	ł			
		255/55R19	7~9	111V XL	С	С	2 73	C1		-			ł			
18	35	265/35R18	9~10.5	97V XL	E	С	2 71	C1					t			
	40	215/40R18	7~8.5	89V XL	E	С	2 72	C1					Ī			
	-	225/40R18	7.5~9	92W XL	Е	С	2 72	C1	92W XL	Е	В	2 72	Ī			
		235/40R18	8~9.5	95W XL	Е	С	2 72	C1								
		245/40R18	8~9.5	97W XL	С	С	2 72	C1	97Y XL	Е	В	2 72	Ţ			
		245/40RF18	8~9.5	** 93V ZPS	F	С	2 72	C1					ļ			
		255/40R18	8.5~10	99V XL	С	С	2 73	C1					1			
		265/40R18	9~10.5	101W XL	С	С	2 73	C1					-			
	45	215/45R18	7~8	93V XL	E	С	2 72	C1					ļ			
		225/45R18	7~8.5	95V XL	E	С	2 72	C1					1			
		235/45R18 245/45R18	7.5~9 7.5~9	98V XL 100V XL	E C	С	2 72	C1	100Y XL	С	В	2 72	ŀ			
		255/45R18	7.5~9 8~9.5	103V XL	С	С	2 73	+	1001 AL		U	- 12	ł			
	50	215/50R18	6~7.5	●92V	-	-		C1								
		225/50R18	6~8	95V	С	С	2 72	C1					f			
		235/50R18	6.5~8.5	101V XL	С	С	2 72	C1	101V XL	С	В	2 72	t			
				104V XL	С	С	2 72	C1					t			
		245/50R18	7~8.5	100V	С	С	2 72	C1					T			
	55	015/55010	6.75	99V XL	С	С	2 72	C1	99V XL	С	В	2 72				
		215/55R18	6~7.5	95V	С	С	2 72	C1					I			
		225/55R18	6~8	98V	E	С	2 72	C1	98V	С	В	2 72	ľ			
		235/55R18	6.5~8.5	100V	С	С	2 72	+	100V	С	В	2 72				
		255/55R18	7~9	109V XL	С	С	2 73	C1	109W XL	С	В	2 72	1			
	60	225/60R18	6~8	104V XL	С	С	2 72	C1	104V XL	С	В	2 72	L			
		00E/00D40	65.05	100H	С	С	2 72	C1	40714134		2	0 70	-			
		235/60R18	6.5~8.5	107H XL	С	С	2 72	C1	107W XL	С	В	2 72	+			
		255/60R18 265/60R18	7~9	112H XL	С	С	2 73	+					F			
		265/60R18 285/60R18	7.5~9.5 8~10	110H 116H	С	С	2 74	C1					Ļ			

Approved rim width and overall diameter from ETRTO standards manual or ETRTO engineering design information.

For some sizes, alternative products are available, as indicated by the specific symbol.

All technical information contained in these pages may be subject to change.

- = Available soon
- = Information available soon
- XL = Extra Load

ZPS = Runflat tyre specification

\*\* = V902B available size

C = Category. C1: Passenger car tyres,

C2: Light commercial vehicle tyres, C3: Heavy commercial vehicle tyres

# **Available Sizes** – Passenger Cars/SUVs/Light Commercial Vehicle Tyres

la ala	Inch Coring Circ		Approved	<i>⇔BluEarth</i>				A		ason			W.	dr	ive							
Inch	Series	Size	rim width	BluEarth∗WINTER V905	Œ <sup>®</sup>	Ú.	<b>(C</b> -0)	С	BluEarth-4S AW21	1		<b>(C</b> -0)	С	W∗drive V903	Œ <sup>®</sup> :	C C	()) с	WY01	Œ	10 .O.	<b>(C</b> -0)	С
17	40	215/40R17	7~8.5	● 87V XL	-	-		C1														
	45	205/45R17	6.5~7.5	88V XL	Е	С	2 72	+														
		215/45R17	7~8	91V XL	E	С	2 72	+	0.004.00	_		0 70	01									
		225/45R17	7~8.5	94V XL 94H XL	E E	С	2 72	+	94W XL 94V XL	E	В	2 72	C1									
		220/101111	7 0.0	91H	E	С	2 72	+	OTVAL	1												
		225/45RF17	7~8.5	* 91H ZPS	F	С	2 72	C1														
		235/45R17	7.5~9	97V XL	С	С	2 72	C1	●97Y XL	-	-		C1									
				94H	Е	С	2 72	<del>-</del>														
	50	245/45R17	7.5~9	99V XL 93V XL	E E	С	2 72	+	93V XL	E	В	2 72	C1									
	30	205/50R17	5.5~7.5	93V XL	С	С	2 72	<del>;                                    </del>	93V AL	-		2 12	U1									
		215/50R17	6~7.5	95V XL	Е	С	2 72	<del>!</del>	95W XL	Е	В	2 72	C1									
				98V XL	С	С	2 72	C1	98V XL	С	В	2 72	C1									
		225/50R17	6~8	98H XL	С	С	2 72	+														
				94H	С	С	2 72	+														
	 55	225/50RF17 215/55R17	6~8 6~7.5	* 94H ZPS 98V XL	F C	С	2 72	-	98W XL	С	В	2 72	C1									
	55	213/33017	0~7.5	101V XL	С	c	2 72	<del>}</del>	101W XL	С	В	2 72	C1									
		225/55R17	6~8	97H	С	С	2 72	+														
		235/55R17	6.5~8.5	103V XL	С	С	2 72	C1	103W XL	С	В	2 72	C1									
		245/55R17	7~8.5	102V	С	С	2 72	+														
	60	215/60R17	6~7.5	96H	E	С	2 72	+	100V XL	С	В	2 72	C1									
		225/60R17 235/60R17	6~8 6.5~8.5	99H 102H	С	С	2 72	+	103V XL	С	В	2 72	C1									
		235/60R17C	6.5~7.5	10211	0	-	2 12	01										117/115R	F	В	2 72	C2
		255/60R17	7~9	106H	С	С	2 73	C1														
	65	215/65R17	6~7.5	99V	С	С	2 72	C1	99V	С	В	2 72	C1									
		225/65R17	6~8	● 106H XL	-	-		C1	106V XL	С	В	2 72	C1									
				102H	С	С	2 72	<del>†</del> —	102H	С	В	2 72	C1									
		235/65R17 255/65R17	6.5~8.5 7~9	108H XL 110H	С	С	2 72	+	108W XL	С	В	2 72	C1									
		265/65R17	7.5~9.5	112T	С	С	2 73	+														
16	45	195/45R16	6~7.5						84V XL	Е	В	2 72	C1	84H XL	F	C 2 7	1 C1					
		215/45R16	7~8						90V XL	Е	В	2 72	C1									
	50	195/50R16	5.5~7	* 88V RF	F	С	2 72	<del>-</del>														
		205/50R16	5.5~7.5	88H XL 91H XL	E E	С	2 72	+														
		195/55R16	5.5~7	87H	E	С	2 72	-	87H	Е	В	2 72	C1									
		195/55RF16	5.5~7	* 87H ZPS	F	С	2 72	<del>                                     </del>														
				94V XL	Е	С	2 72	C1	94V XL	Е	В	2 72	C1									
		205/55R16	5.5~7.5	94H XL	Е	С	2 72	<del>}</del>		-												
				91H	E	С	2 72	+	91V	E	В	2 72	C1		-							
		205/55RF16	5.5~7.5	91T * 91H ZPS	E F	С	2 72	1														
				97V XL	С	С	2 72	+	97V XL	Е	В	2 72	C1									
		215/55R16	6~7.5	97H XL	С	С	2 72	C1														
				93H	С	С	2 72	+														
		225/55R16		99V XL	E C	С	2 72	+	99V XL	С	В	2 72	C1									
		220/00H10	6~8	99H XL 95H	E	С	2 72	+		-												
	60	175/60R16	5~6											82H	F	C 2 7	0 C1					
		185/60R16	5~6.5											86H	F	C 2 7	2 C1					
		195/60R16	5.5~7	89H	Е	С	2 72	C1														
		205/60R16	5.5~7.5	96H XL	С	С	2 72	C1	96V XL 96H XL	E	B B	2 72	C1 C1									-
				90H AL	-		2 12	UI.	99V XL	С	В	2 72										
		215/60R16	6~7.5	99H XL	С	С	2 72	C1	99H XL	С	В	2 72	•									
		215/60R16C	6~7															103/101T	F	В	2 71	C2
		225/60R16	6~8	102H XL	С	С	2 72	+														
		235/60R16 195/65R16C	6.5~8.5	100H	С	С	2 72	C1	● 100H	-	-		C1					104/3007	-	В	0 70	
	65	205/65R16C	5.5~6 5.5~6.5															104/102T 107/105T	F	В	2 72	+
		215/65R16	6~7.5	98H	С	С	2 72	C1	98H	С	В	2 72	C1					121001				<u> </u>
		215/65R16C	6~7															109/107T	F	В	2 72	C2
		225/65R16	6~8	100H	С	С	2 72	C1														
		225/65R16C	6~7															112/110R	F	В	2 72	-
		235/65R16C	6.5~7.5															121/119R 115/113R	F	В	2 72	+
		255/65R16	7~9	109H	С	С	2 73	C1										710/11011	-	- 5	_ 12	- J2
	70	215/70R16	5.5~7	100T	С	С	2 72	+														
		225/70R16	6~7.5	107H XL	С	С	2 72	C1														
		235/70R16	6~8	106T	С	С	2 72	+														
		245/70R16 265/70R16	6.5~8 7~9	107T	С	С	2 72	<del>}</del>														
		275/70R16	7~9 7~9	112T 114T	С	С	2 73	+														
				1 ****		-			I .	1			į.	1	1			1				

# Available Sizes - Passenger Cars/SUVs/Light Commercial Vehicle Tyres

Inch Series Size		Sizo	Approved				orth		A		W.	(c)	r/\	ve									
IIICII	Jelles	Size	width	BluEarth∗WINTER V905	<b>(6</b> *	O.	<b>(C</b> -0)	С	BluEarth-4S AW21	(L <sup>®</sup>	Œ.		С	W∗drive V903	(L	a.	<b>(C</b> -0)	) с	WY01	<b>(L</b> '	d.	<b>C</b> o	()
16	75	185/75R16C	5~6																104/102R	F	В	2 72	-
		195/75R16C	5~6												+				110/108T 107/105R	F	В	2 72	
		205/75R16C	5.5~6.5																110/108R	F	В	2 72	$\rightarrow$
		215/75R16C	5.5~7																116/114R	F	В	2 72	2 (
																			113/111R	F	В	2 72	<del></del>
		225/75R16C	6~7	104T.VI	_		0 70	C1		-					-				121/120R	F	В	2 72	2
	80	205/80R16 215/80R16	5~7 5.5~7	104T XL 103T	С	С	2 72	<del>,</del> —		-										_			+
		235/80R16	6~8	109T	С	С	2 72	÷ -															1
15	50	195/50R15	5.5~7	82H	Е	С	2 72	C1	82H	Е	В	2 72	C1										1
	55	175/55R15	5~6		ļ									77T	F	С	2 70	C1					
		185/55R15	5~6.5	86H XL	E	С	2 71	-	86H XL	E	С	2 71	C1		-								_
		195/55R15 205/55R15	5.5~7 5.5~7.5	85H 88T	E	С	2 72	<del>.</del>	89V XL	E	В	2 72	C1		-								+
	60	155/60R15	4.5~5.5	001	<u> </u>		- 12							74T	F	С	2 70	C1					+
		165/60R15	4.5~6											77T	F	С	2 70	<del>;</del>					$\top$
		175/60R15	5~6											81T	F	С	2 70	C1					
		185/60R15	5~6.5	88T XL	Е	С	2 71	$\rightarrow$	88H XL	Е	С	2 70	C1										1
				84T	E	С	2 71	C1	201/1//	-	-	0.70	01		-					_			4
		195/60R15	5.5~7	88T	Е	С	2 72	C1	92V XL 88H	E	В	2 72	C1		-					-			+
		205/60R15	5.5~7.5	91H	E	С	2 72	-	0011	-		2 12	01										+
	65	165/65R15	4.5~6											81T	F	С	2 70	C1					$\top$
		175/65R15	5~6						84H	Е	С	2 70	C1	84T	F	С	2 70	C1					I
		185/65R15	5~6.5		ļ				92V XL	Е	С	2 70	C1	92T XL	F	С	2 70	+					_
				OFT VI	-		0 74	- 01	88H	E	С	2 70	C1	88T	F	С	2 70	C1					_
		195/65R15	5.5~7	95T XL 91H	E	С	2 71	C1	91H	Е	В	2 70	C1		-					_			+
		193/031113	3.5~7	91T	С	С	2 71	•	3111	-		2 10	01		-					_			+
		205/65R15	5.5~7.5	94H	С	С	2 72	÷ -															
		205/65R15C	5.5~6.5																102/100T	F	В	2 72	2
		215/65R15	6~7.5	96H	С	С	2 72	C1							ļ								
		215/65R15C 195/70R15C	6~7 5~6		-														104/102T 104/102R	F	В	2 72	÷
	70	205/70R15	5~7	96T	С	С	2 72	C1											104/102h			2 11	-
		205/70R15C	5.5~6.5																106/104R	F	В	2 7	2
		215/70R15C	5.5~7																109/107R	F	В	2 72	2
		225/70R15	6~7.5	100T	С	С	2 72	C1															
		225/70R15C	6~7	1107			0.70	01							-				112/110R	F	В	2 72	2
	80	265/70R15 195/80R15	7~9 5~6.5	112T 96T	C E	С	2 73	C1							-					-			-
	00	215/80R15	5.5~7	102T	С	С	2 72	$\rightarrow$															
4	55	185/55R14	5~6.5											80T	F	С	2 71	C1					7
	60	165/60R14	4.5~6											79T XL	F	С	2 70	C1					
		175/60R14	5~6		ļ									79T	F	С	2 70	-					
		185/60R14	5~6.5		-			-	82H	E	С	2 70	C1	82T	F	С	2 70	+					_
	65	155/65R14 165/65R14	4.5~5.5 4.5~6											75T 79T	F	С	2 70	+					-
														86T XL	F	С	2 70	+					-
		175/65R14	5~6						82T	Е	С	2 70	C1	82T	F	С	2 70	C1					┪
		175/65R14C	5~5.5		ļ														90/88T	F	В	2 72	2
		185/65R14	5~6.5		ļ_					-				86T	F	С	2 70	C1					4
		195/65R14 185R14C	5.5~7 5~6	* 89T	F	С	2 72	C1											102/100Q	F	С	2 72	2
		195R14C	5~6																102/100Q 106/104Q	F	С	2 7	-
		205R14C	5.5~6.5																109/107Q	F	С	2 7	-
		215R14C	5.5~7																112/110Q	F	С	2 72	2
	70	165/70R14	4~5.5		<u> </u>			ļ						81T	F	С	2 70	-					
		175/70R14	4.5~6		-			-						88T XL 84T	F	С	2 70	+					
		185/70R14	4.5~6											841 88T	F	C	2 70	+		-			-
3	65	155/65R13	4.5~5.5											73T	F	С	2 70	<del>-</del>					
		165/65R13	4.5~6											77T	F	С	2 70	<del>-</del>					
		175/65R13	5~6											80T	F	С	2 70	C1					
								. 7					. I	75T	F	С	2 70	C1		1			- (
	70	155/70R13	4~5												$\rightarrow$			+		+	_		
	70	155/70R13 165/70R13 175/70R13	4~5 4~5.5 4.5~6											83T XL 82T	F	С	2 70	C1					1

Approved rim width and overall diameter from ETRTO standards manual or ETRTO engineering design information.

For some sizes, alternative products are available, as indicated by the specific symbol. All technical information contained in these pages may be subject to change.

= Available soon

- = Information available soon

XL = Extra Load RF = Reinforced ZPS = Runflat tyre specification

\* = V902A available size


(Fig. 1) = Tyre labelling see page 10 C = Category. C1: Passenger car tyres, C2: Light commercial vehicle tyres, C3: Heavy commercial vehicle tyres

## **Technical Information**

#### Aspect ratio

The aspect ratio is the ratio of a tyre's section height (H) to its section width (W).

Aspect ratio (%) =  $\frac{H}{W}$  x 100



#### Speed symbol

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

Speed symbol	Speed (km/h)
N	140
P	150
Q	160
R	170
S	180
T	190
Н	210
V	240
W	270
Y	300
M	over 300

#### Load index

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

LI	kg	LI	kg	LI	kg
61	257	81	462	101	825
62	265	82	475	102	850
63	272	83	487	103	875
64	280	84	500	104	900
65	290	85	515	105	925
66	300	86	530	106	950
67	307	87	545	107	975
68	315	88	560	108	1000
69	325	89	580	109	1030
70	335	90	600	110	1060
71	345	91	615	111	1090
72	355	92	630	112	1120
73	365	93	650	113	1150
74	375	94	670	114	1180
75	387	95	690	115	1215
76	400	96	710	116	1250
77	412	97	730	117	1285
78	425	98	750	118	1320
79	437	99	775	119	1360
80	450	100	800	120	1400
				121	1450
				122	1500
				123	1550

#### Reinforced (Extra Load) Indication

Passenger car tyres designed for loads and inflation pressures higher than the standard version.

#### Tyre rotation


Tyre rotation is the regular practice of changing the position of each tyre on the car to minimise abnormal (or uneven) tread wear, which may cause:

- 1. Abnormal vibration ("shimmy")
- 2. Tyre noise
- 3. Decreased riding comfort
- 4. Shorter tyre life

**Note:** We recommend that you rotate your tyres immediately if you recognise any of the above-mentioned conditions (especially on your front tyres).



Sidewall Symbol for Severe Snow Use Tyres
Tyres designed for and which have passed a certain standard for use in severe snow conditions are marked on the sidewall with a snowflake symbol.

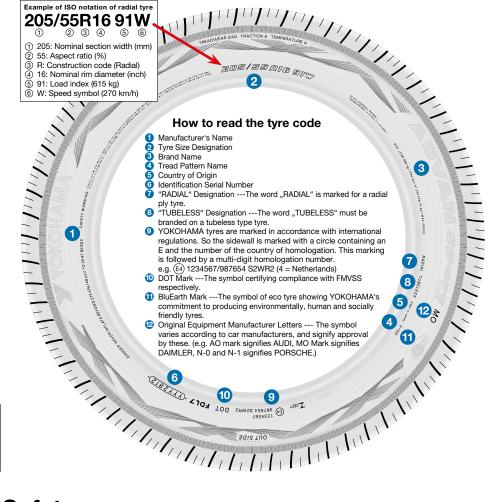

# For Your Comfort & Safety

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.
- Never inflate beyond 275 kPa (2.75 bar, 40 psi) to seat beads.
- Tyre inflation should be done in a safety cage.
- Do not mix different tyre size designations or constructions on the same axle, except for limited use of temporary spare tyres.
- Outer diameter of wheel should be the same as inner diameter of tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure (Particularly driving on a highway and/or when carrying heavy loads).
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under-inflation is dangerous and could lead to accidents or tyre damage.
- Check tyre inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other foreign objects stuck in the tyre treads may damage the tyre. Remove foreign objects from the tyre treads.
- Tyre should only be mounted by professionally trained persons.
- Objects in the road such as potholes, glass, metal, rocks, wood debris, kerbstones and such, which could damage a tyre should be safely avoided.
- To preserve traffic safety and tyre life, YOKOHAMA recommends driving safely and avoiding hard acceleration, braking or cornering in unnecessary situations.

- If you feel the car is unstable or feel any unusual noises or vibrations, stop your car in a safe place and inspect your tyres. Even if no visible defects are found, drive slowly and ask your tyre dealer to inspect your tyres as soon as possible.
- Winter tyres (studless, stud or snow tyres) should not be mixed with other types of tyres.
- New winter tyres should not be driven over 80 km/h for the first 100 km.
- When driving on winter roads, sudden starts and quick stops should be avoided, and a safe car-tocar driving distance should be maintained.
- When using tyre chains, be sure to use the proper size chains and affix with priority to the drive axle.
- Avoid driving with tyre chains for long distance on roads with no packed snow or ice.

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

To preserve traffic safety, YOKOHAMA recommends driving substantially slower under adverse weather or road conditions.

# Never use a tyre under the following conditions and replace tyres immediately:


- If the tread has worn to the tread wear indicator.
- If breaks in the fabric appear.
- If cords or wires are exposed.

#### Storage of steel belted radial tyres:

- Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders etc.
- Tyres should be preferably stored in a cool, dry, and dark room with a controlled environment.

#### Important notice for use of Runflat tyre (ZPS)

- A vehicle must be equipped with a tyre pressure monitoring system.
- After a low pressure warning has been indicated:
- do not exceed 80 km/h (50 mph).
- do not travel more than 80 km (50 miles).
- do not re-inflate after run flat operation and do not repair.

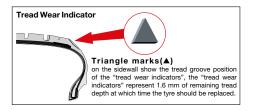

Construction and specifications are subject to change with or without notice.



# Explore the World of YOKOHAMA

The YOKOHAMA Europe App uses dynamic content and advanced augmented reality to showcase our technology, products and areas of Global interest.

With a significant focus on innovation, safe tyres and products which are beneficial to society, use the app now and have direct access to a tyre-finder, product information, YOKOHAMA news and some surprises. https://www.yokohama-online.com/app



NOTES		

# Original Equipment

#### The tyre supplier for premium car manufacturers

YOKOHAMA summer tyres have been adopted worldwide as original equipment in the automotive industry in a wide range of vehicle categories, including high-quality Flagship cars; ultra-high-performance sports cars with a stellar global reputation as Porsche, BMW M and Mercedes-AMG; Premium SUVs by Porsche, BMW and Mercedes-Benz; luxury sedans by Mercedes-Benz and Audi; sporty roadsters by FIAT; microcars such as smart and other segments and products of leading car manufacturers.



#### **Brands**

AUDI **LEXUS PORSCHE** LOTUS **BMW RENAULT** BMW M MAZDA **SMART CHRYSLER MERCEDES-BENZ SUBARU** CITROËN MERCEDES-AMG SUZUKI FIAT MITSUBISHI TOYOTA **HONDA NISSAN VOLKSWAGEN** 

INFINITI PEUGEOT





www.yokohama-online.com



